


Datasheet mUPS 12V micro Uninterruptible Power Supply

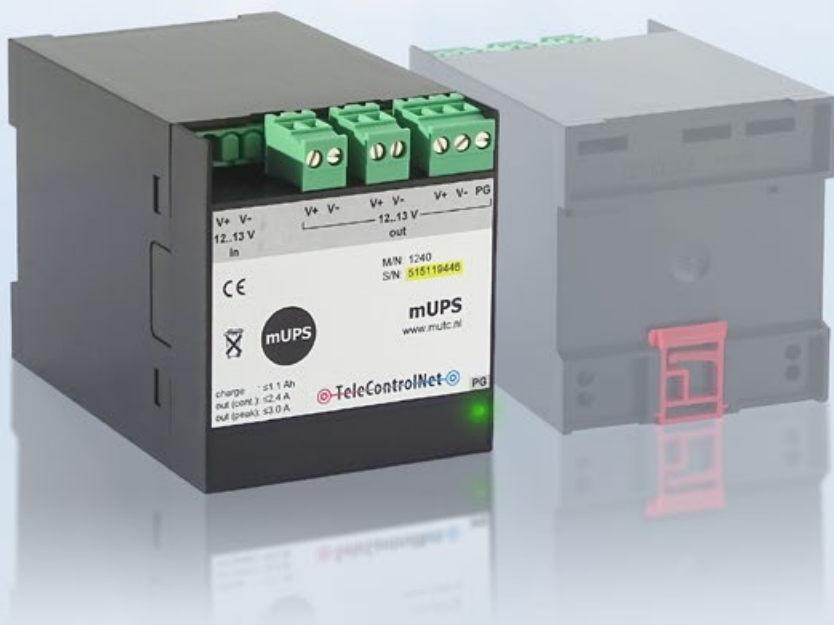

► Introduction

The mUPS (micro Uninterruptible Power Supply) is designed as a power supply system for the TC302 and JAZZmin TeleControllers. The mUPS comes standard with a 230 V AC DIN rail power supply. The power supply may vary slightly from the model shown below.

mUPS:



Power supply:



► Main functions

The 12 V mUPS functions as a power supply system for the TC302 TeleController. It stabilizes the incoming mains power and provides a stable output voltage. In the event of a mains power failure it also functions as a battery back-up and will send a signal of mains power loss to the TC302. The TC302 will then send an alarm message to TeleControlNet.

Tasks

The mUPS performs three major tasks:

1. It stabilizes the mains power.
2. It acts as a battery back-up in the event of a mains power failure.
3. It sends a signal to the TC302 when it detects a mains power failure, so the TC302 can send an alarm message to TeleControlNet.

► Main features

- Designed for TeleController applications.
- DIN rail mountable.
- Maintenance-free lead acid battery (recommended battery change every two years).
- Usable in any orientation except permanently inverted.
- Three power outputs.

Electrical description of mUPS

- Input voltage: 85 to 264 V AC
- Input frequency: 47 to 63 Hz
- Input current: 1 A @ 230 V AC
- Inrush current: 60 A @ 230 V AC
- Nominal output voltage: 12.5 to 13.5 V DC*
- Maximum total output current: 3.0 A
- Maximum available charge in case of mains power failure: 1.1 Ah* (dependent on output current) @ 8.8 to 11.4 V

* with fully charged battery

Physical description of mUPS (excluding power supply)

- Height: 76 mm (3.0")
- Width: 68 mm (2.7")
- Depth: 105 mm (4.13")
- Weight (including 3 front connectors): 692 g (1.53 lbs)

Physical description of (power supply)

- Height: 92 mm (3.6")
- Width: 40 mm (1.6")
- Depth: 101 mm (3.98")
- Weight (excluding cables): 281 g (0.619 lbs)

Operating temperature

- mUPS: -15 to 50 °C (5 to 122 °F)
- Power supply: -20 to 60 °C (-4 to 140 °F)

Maintenance

- Recommended battery change every two years

Inter Act industrial automation B.V.

Dijkgraafweg 16, 7336 AT Apeldoorn - P.O. Box 1011, 7301 BG Apeldoorn - The Netherlands
Tel.: +31 (0)55 534 2002 - Fax: +31 (0)55 534 2010 - www.interact.nl - info@interact.nl

Copyright ©2018 Inter Act industrial automation B.V. All Rights Reserved.

The information in this document is subject to change without prior notice in order to improve reliability, design and function and does not represent a commitment on the part of the manufacturer.

In no event will the manufacturer be liable for direct, indirect, special, incidental or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic or other means in any form without prior written permission of the manufacturer.